


TYPE “K” FUSIBLE LINKS

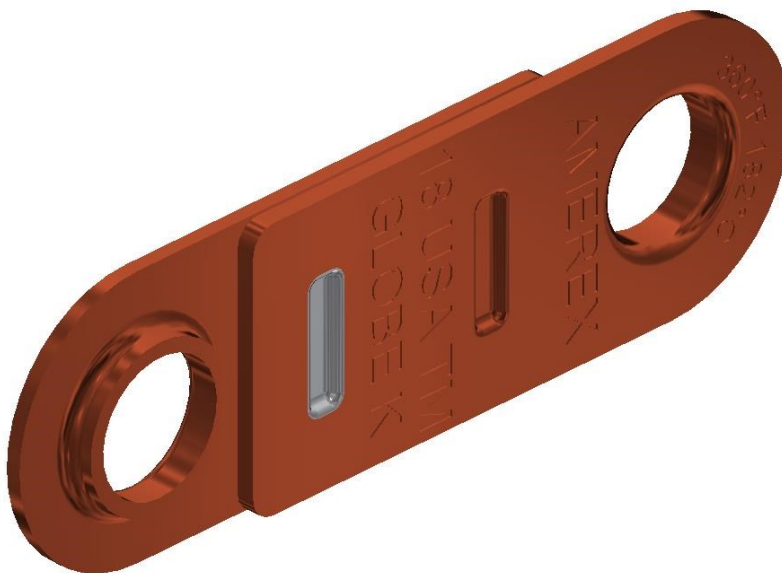

EXPOSURE LIMIT				
Part No.	Link Rating		Max. Ambient	
12326	212 °F	100 °C	150 °F	66 °C
12327	280 °F	138 °C	225 °F	107 °C
12328	360 °F	182 °C	300 °F	149 °C
12329	450 °F	232 °C	375 °F	191 °C

Multiple temperature ratings of fusible links are available. They are assembled using solder which will melt at a predetermined temperature allowing the two halves of the link to separate, triggering the detection network.

Available as singles or as bulk packs with P/N #####-P025